



## HL1L2IRA-XSM-4-3 ANTENNA FAMILY

### Lightweight Dual-Band GNSS Plus Iridium Helical Antenna

The HL1L2IRA-XSM-4-3 is a high performance, lightweight antenna designed for dual-band GNSS plus Iridium operation. This "air core" helical antenna offers right hand circularly polarized (RHCP) gain across the upper hemisphere. Frequency coverage includes L1/L2 GPS, L1/L2 GLONASS, L-Band Corrections, and Iridium.

The antenna includes an integrated SMA connector for easy mounting onto your device or platform. Optional accessories include flexible gooseneck adapters. The antenna is designed for rugged applications including military handheld, airborne, and ground vehicles.

This product is available with or without integrated amplification. Please contact us to discuss options.



### BENEFITS

- High performance antenna for demanding applications
- Ultra lightweight design

### FEATURES

- Right hand circularly polarized (RHCP) gain
- Dual-band GNSS coverage for assured position, navigation, and timing (PNT)
- Iridium compatibility
- Easy installation

**ELECTRICAL**

<b>Frequency Range</b>	
L1 GPS	1575.42 ± 12 MHz
L2 GPS	1227.60 ± 12 MHz
L-Band/Rx INMARSAT	1542.50 ± 17.5 MHz
L1 GLONASS	1598 - 1609 MHz
L2 GLONASS	1242 - 1252 MHz
IRIDIUM	1610 - 1626 MHz
VSWR	< 2.0:1
Impedance	50 ohms
Polarization	RHCP



**MECHANICAL & ENVIRONMENTAL**

Designed to:

<b>Weight</b>	0.71 oz Typical
<b>Temperature</b>	-55°C TO +85°C
<b>Altitude</b>	70,000 ft
<b>Vibration</b>	> 30 Grms

**ENCLOSURE**

<b>Color</b>	Unpainted Black Ultem
<b>Connector</b>	SMA Male

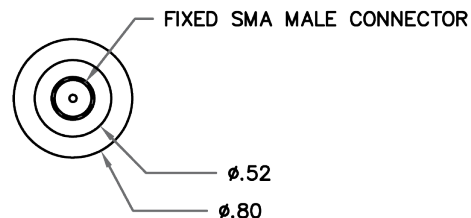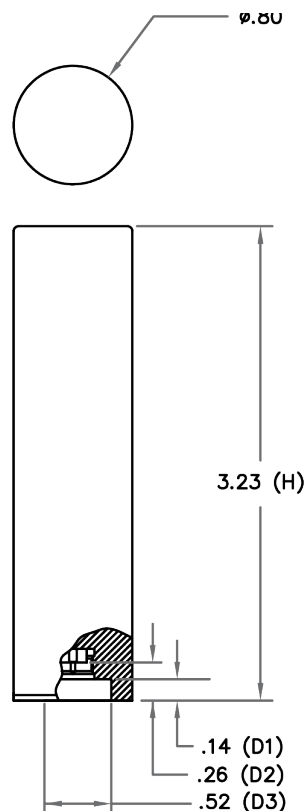

**CONTACT ANTCOM**

Phone: +1-310-782-1076  
 Fax: +1-310-782-1086  
 Email: sales.pi.antcom@antcom.com  
 Web: antcom.com

